

Linear collection

Black magic side panel installation


Black glass reflector panels, enhances the flame picture by producing a mirror image of the flames in the side panels. Ideally installed at the same time as the Linear as retrofitting will require removing a number of internal components, which will add cost and time. If being installed at the time of installing the Linear the panels will be installed before adding the burn media.

Model	Order code	Kit contents
800	R2910	Two side glass panels and a top panel retainer bracket set to replace existing retainers. The replacement retainer brackets are different in size. LH has vertical keyhole slots, RH has horizontal keyhole slots. Refer drawing on next page.
1000 / 1500	R2911	

The Linear models come with the ceramic panels already installed. The first step in fitting the glass panels will be to remove the existing ceramic side panels. To do this loosen the two screws holding the top retainer in place. For the RHS, slide back and remove, for the LHS slide up and remove.

Single-sided models: Carefully lift the side decorative panels up and rotate the front edge towards the centre of the fire and remove.

Double-sided models: Bring the top edge of the decorative panel into the firebox, lift and remove.

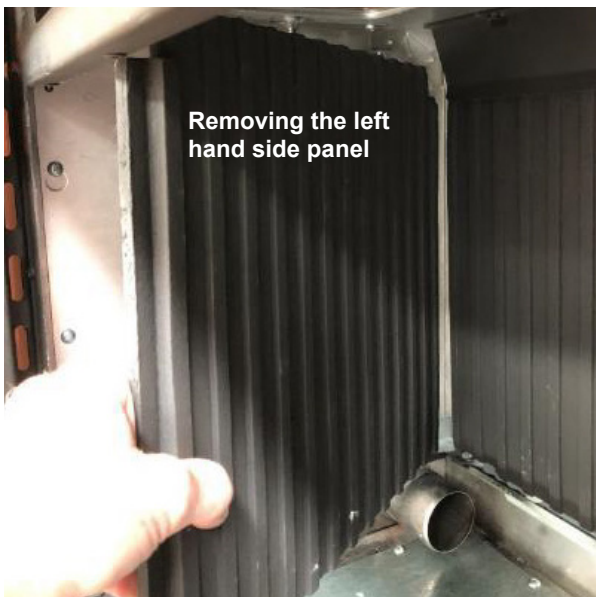

Linear collection Black magic side panel installation

Glass panel installation

1. Two screws hold the panel support bracket to the top of the combustion chamber. For the glass panels these need to be adjusted in the fully-forward position, refer A below. The aim is to get the panels parallel to the side of the fire.
2. Fold up the bottom retainer tabs (two per end), refer C and D below.
3. Install the side panels.
4. Install the top panel retainer brackets from the glass panel kit. Refer below for which bracket is positioned left and which bracket is positioned right.

